

AGM2E 112 M 2

IE2

GAMAK

3-Phase 400 V (Δ) 50 Hz

Duty Type : S1

Degree of protection : IP 55 (TEFC)


Insulation class : F (155 °C)

Temp rise : Class B (80K)

Mounting Design : B3

ELECTRICAL DESIGN

Direct On Line

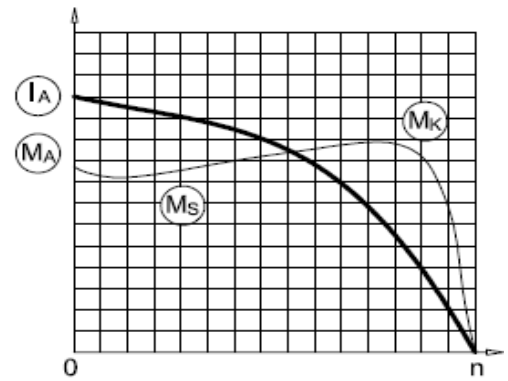

Rated output (kW) : 4

Locked rotor Current – I_a (A) : 53

I_a / I_n : 7.2

Speed (rpm) : 2880

Locked rotor Torque – M_a (Nm) : 37

M_a / M_n : 2.8

Rated current (A) : 7.4

Y / Δ Starting

Torque – M_n (Nm) : 13.1

Locked rotor Current – I_a (A) : 17

I_a / I_n : 2.3

Cos φ : 0.90

Locked rotor Torque – M_a (Nm) : 12

M_a / M_n : 0.9

	4/4	3/4	1/2
Efficiency %	86.5	86.5	86

Moment of inertia J (kgm)² : 0.0039

Breakdown Torque – M_k (Nm) : 46

M_k / M_n : 3.5

MECHANICAL DESIGN

Frame : Aluminium

End shields : Aluminium

Cooling fan : Plastic

Terminal box : Plastic

Cable gland : Pg 16

No of cable glands : 2

Bearing Arrangement

Standard design

Drive End

6206 ZZ

Non Drive End

6206 ZZ

Reinforced design


-

-

Noise Level (dB-A) : 63

Paint : RAL 7031- Grey

Approximate weight (kg) : 21.5

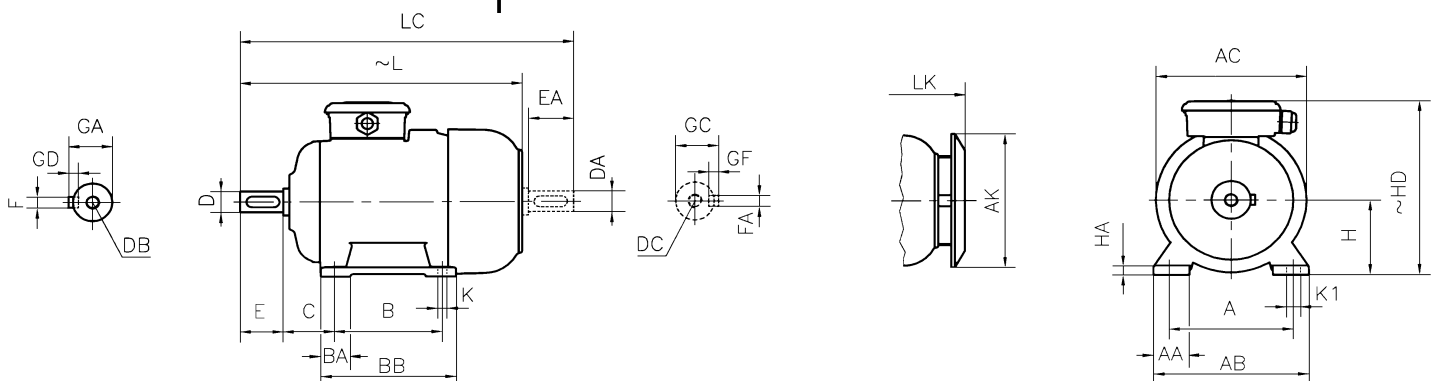

DIMENSIONS

Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6																							
H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB DC	ØD ØDA	GA GC	FxGD FAXGF
112	257	13	190	47	230	218	189	12	18	140	-	39	-	175	396	462	433	70	60	M10	28	31	8X7

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.