

GM2E 200 L 4**IE2****GAMAK**

3-Phase 400 V (Δ) 50 Hz

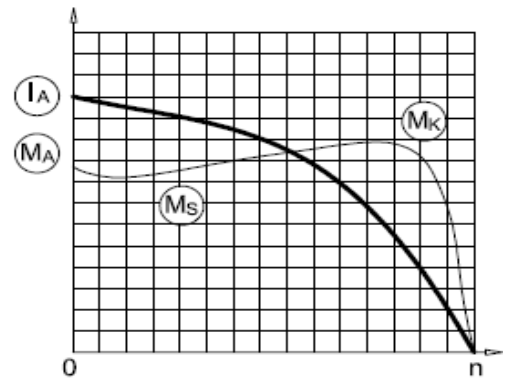
Duty Type : S1

Degree of protection : IP 55 (TEFC)

Insulation class : F (155 °C)

Temp rise : Class B (80K)

Mounting Design : B3

**ELECTRICAL DESIGN****Direct On Line**

Rated output (kW) : 30

Locked rotor Current – Ia (A) : 440

Ia / In : 8.0

Speed (rpm) : 1470

Locked rotor Torque – Ma (Nm) : 605

Ma / Mn : 3.1

Rated current (A) : 55

Y / Δ Starting

Torque – Mn (Nm) : 195

Locked rotor Current – Ia (A) : 143

Ia / In : 2.6

Cos φ : 0.85

Locked rotor Torque – Ma (Nm) : 195

	4/4	3/4	1/2
Efficiency %	92.5	92.6	92.1

Ma / Mn : 1.0

Moment of inertia J (kgm)² : 0.22

Breakdown Torque – Mk (Nm) : 702

Mk / Mn : 3.6

MECHANICAL DESIGN

Frame : Cast Iron

End shields : Cast Iron

Cooling fan : Plastic

Terminal box : Aluminium

Cable gland : Pg 36

No of cable glands : 2

Bearing Arrangement

Standard design

Drive End

6312 ZZ C3

Non Drive End

6212 ZZ C3

Reinforced design

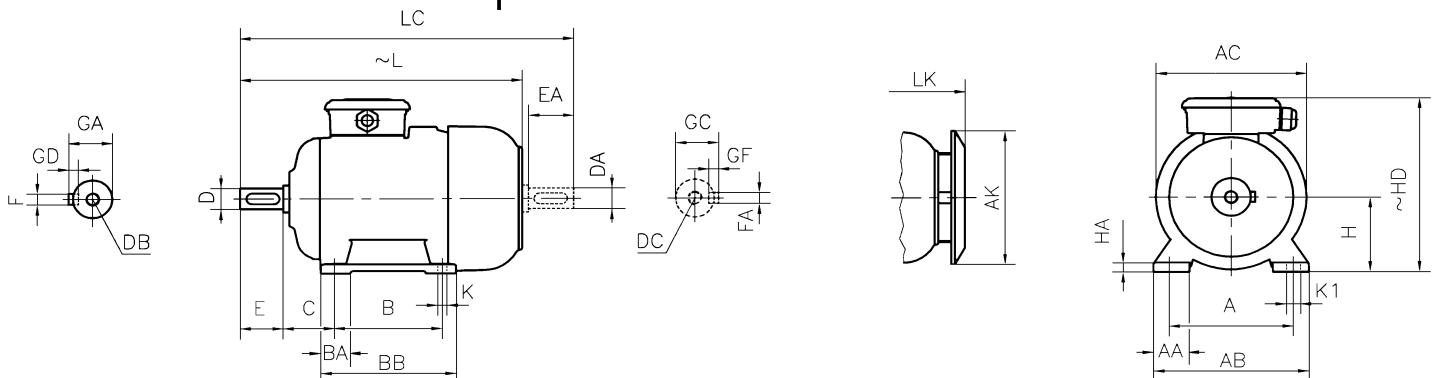
NU 312 E

6312 C3

Noise Level (dB-A) : 64

Paint : RAL 7031- Grey

Approximate weight (kg) : 225

**DIMENSIONS****Dimensions of foot mounted motors for mounting arrangement : B3, B6, B7, B8, B15, V5, V6**

H	HD ~	HA	A	AA	AB	ØAC	ØAK	K	K1	B	B'	BA	BA'	BB	L ~	LC	LK ~	C	E EA	DB DC	ØD ØDA	GA GC	FxGD FAXGF
200	477	26	318	80	398	390	370	19	-	305	-	68	-	355	747	865	803	133	110	M20	55	59	16X10

* Efficiencies are calculated according to indirect method where the additional load losses are determined from exact measurements at different load points.